



VGB 2008 COMPLIANT



For Multiple Drain Use Only
175 GPM - Submerged
Life: 7 Years
Floor or Wall

175 GPM FIBERGLASS POOL SUCTION

CMP 25215-000-000

Read and keep these instructions for future reference. Always plumb and install all suction fittings according to all building codes that apply in your area.

WARNING: When using two or more suction fittings on a common suction line, suction must be separated by a minimum of 3 ft or they must be located on two different planes (i.e. one on floor and one on the wall).

WARNING: DO NOT locate suction outlets on seating areas or on backrests for such seating areas.

The maximum flow rating for this suction fitting is 175 GPM. This suction fitting is designed for installation on side wall or floor of portable spas, hot tubs, or pools in conjunction with at least one other suction fitting per pump. DO NOT adapt suction fitting to any pipe size smaller than ASTM 2" SCH 40 PVC. Suction fitting and fasteners should be observed for damage or tampering before each use. Missing, broken, or cracked suction fittings shall be replaced before use. Loose suction fittings shall be reattached or replaced before use. Mount suction fittings on the walls, in the foot wells of portable spas, hot tubs, or pools. Do not mount directly under seats. Follow all winterizing instructions and recommendations of your pool and spa professional. Open area of the suction cover is 12.88 in².

TOOLS NEEDED:

Hole Saw, Torque Wrench, Phillips Head Screwdriver

INSTALLATION INSTRUCTIONS


- Using hole saw, cut/drill the installation hole.
- If optional gasket is used, gasket must be placed around threads of suction wall fitting at this time.
- Place threads of wall fitting through hole from the inside (water side) of tub/pool.
- Install nut from dry side of tub onto the threads of the wall fitting.
- Using torque wrench, torque nut to <44.0 ft. lbs. (60Nm)
- Verify that the suction cover is properly tightened and secured with stainless steel screw.

NOTE: If silicone is used on fitting, verify that silicone is compatible with ABS and PVC plastics.

CAUTION: DO NOT over-torque fitting. Excessive torque can cause premature failure of threads or damage to suction fitting increasing risk of entrapment.

NOTE: In the event that one suction outlet is completely blocked, the remaining suction outlet(s) serving that system MUST have a flow rating capable of the full flow of the pump(s) for the specific suction system.

NOTE: Increasing size of the pump may increase flow rate of suction beyond rated safety limits causing entrapment or death.

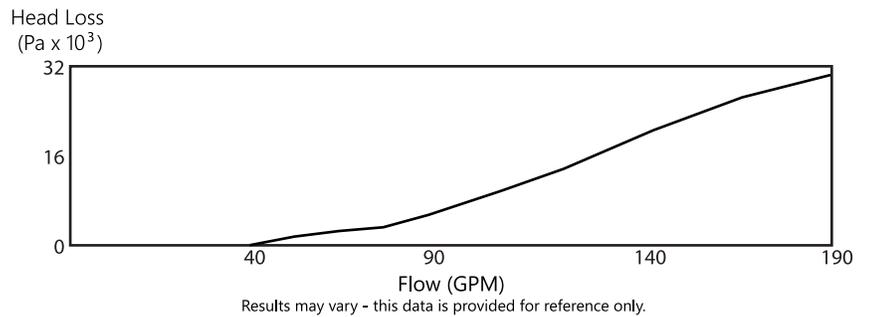

REPLACEMENT PARTS



25215-00X-003
(*X* specifies color)

SUCTION COVER



25215-000-002

WALL FITTING



25215-000-004

GASKET



25215-000-001

NUT



61008-083-200

SCREW

*Replace all parts within 7 installed years or immediately upon evidence of degradation or damage.



CAUTION: Hair or body parts blocking the spa or pool suction may become trapped and held against the suction fitting. Entrapment against the suction fittings can result in drowning or other severe injury. Never sit on or lean up against suction fittings. Never exceed the maximum allowable flow rate stated on the suction fitting. The suction fitting and fasteners should be inspected for damage or tampering before each use of the facility. Missing, broken, or cracked suction fittings shall be replaced before using this facility. Loose suction fittings shall be reattached or replaced before use of this facility.

WARNING: To reduce the risk of drowning from hair and body entrapment, install suction fittings with a marked flow rate in gallons per minute that exceeds the flow rate of your system by at least 25%. Always use multiple suction outlets. If the fitting/cover breaks, is damaged, or is missing, shut the system down immediately. Do not use the system until damaged parts have been replaced.

WARNING: Keep hair and clothing a minimum of 12 inches from all suction fittings and drains at all times. Persons with long hair should secure hair to a minimal length or wear swimming cap. Children should never be left unattended at any time in a swimming pool, spa, or bathtub. Be sure the temperature of the water never exceeds the manufacturer's recommendations